


STEALTH™ Air-Foil License Bracket Assembly



Enclosed Parts



Transfer Light

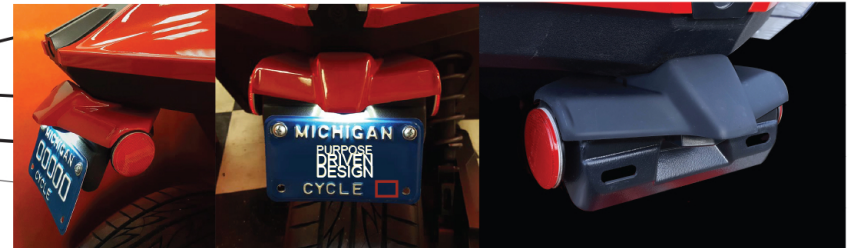

Slingshot: Rear Upper Deck/ Backup Camera
Lower Black Body Cladding

Stealth: Air-Foil

Slingshot DOT Reflector Bracket

Slingshot OEM License Plate Light

Stealth License Plate Bracket

License Plate & Fasteners
(Not Provided)

Original (OEM) License Bracket Assy.

Refer to step (A.) picture (2) for unplugging the license plate light.

B. Transfer the light to the new License Bracket and remove the DOT reflector assembly.

C. Align and install the Air-Foil with (1) of the removed Torx screws.

D. Install DOT reflector assembly with the Stealth License Bracket directly beneath. Use (2) provided (6) mm stainless steel screws with flat and lock washers as shown. Carefully align parts before tightening both screws.

E. Plug the license plate wire back into the Slingshot harness and secure the hanging wire.

F. Secure the license plate to the Stealth License Plate Bracket. Use flat and lock washers where shown.*



Pic (1)

A. Unplug the plate light and remove the OEM License Bracket.

Release to unplug, pulling on spring latch, before unplugging wires.

Note: The OEM license plate bracket is secured with (3) Torx screws. Save them.



Pic (2)

Install license plate light
(Save fasteners for reuse.)

